October 29, 1999

BOX PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

Re: Application of **Luc DARTOIS**

METHOD FOR LINEARISING A POWER AMPLIFIER OVER A WIDE FREQUENCY BAND
Our Ref. Q56457

Dear Sir:

Attached hereto is the application identified above including 12 sheets of the specification, claims and abstract, 1 sheet of formal drawings, executed Assignment and PTO 1595 form, and executed Declaration and Power of Attorney.

Please see attached preliminary amendment before calculating Government Filing Fee.

The Government filing fee is calculated as follows:

Total claims	12	- 20	=	0	x	$18.00 =	$.00
Independent claims	1	- 3	=	0	x	$78.00 =	$.00
Base Fee							$760.00

TOTAL FILING FEE	**$760.00**
Recordation of Assignment	$40.00
TOTAL FEE	**$800.00**

Checks for the statutory filing fee of $760.00 and Assignment recordation fee of $40.00 are attached. You are also directed and authorized to charge or credit any difference or overpayment to Deposit Account No. 19-4880. The Commissioner is hereby authorized to charge any fees under 37 C.F.R. §§ 1.16 and 1.17 and any petitions for extension of time under 37 C.F.R. § 1.136 which may be required during the entire pendency of the application to Deposit Account No. 19-4880. A duplicate copy of this transmittal letter is attached.

Priority is claimed from June 30, 1999 based on European Application No. 99401627.7. The priority document is enclosed herewith.

Respectfully submitted,
SUGHRUE, MION, ZINN,
MACPEAK & SEAS, PLLC
Attorneys for Applicant

By: David J. Cushing
Registration No. 28,703

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of

Luc DARTOIS	Attorney Docket Q56457
Appln. No.: Not yet assigned	Group Art Unit: Not yet assigned
Filed: October 29, 1999	Examiner: Not yet assigned

For: METHOD FOR LINEARISING A POWER AMPLIFIER OVER A WIDE FREQUENCY BAND

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Prior to examination, please amend the above-identified application as follows:

IN THE CLAIMS:

Claim 9,   line 1, delete "any of the previous claims" and insert --**claim 1**--.

Claim 10,   line 2, delete "any of claims 1 to 8" and insert --**claim 1**--.

Claim 11,   line 2, delete "any of claims 1 to 8" and insert --**claim 1**--.

IN THE ABSTRACT:

Delete the title in its entirety.

After the abstract, delete "Figure 3:".

REMARKS

Entry and consideration of this Amendment is respectfully requested.

Respectfully submitted,

David J. Cushing
Registration No. 28,703

SUGHRUE, MION, ZINN,
  MACPEAK & SEAS, PLLC
2100 Pennsylvania Avenue, N.W.
Washington, D.C. 20037-3213
Telephone: (202) 293-7060
Facsimile: (202) 293-7860

Date: October 29, 1999

METHOD FOR LINEARISING A POWER AMPLIFIER OVER A WIDE FREQUENCY BAND

Background of the Invention

The invention relates to a method for linearising a power amplifier and to an

5 amplifier using such method. It relates also to a transmitter comprising a power amplifier of this kind.

Generally, power amplifiers are used near saturation in order to obtain the most efficient use of such amplifiers. However, near saturation, the amplifier has a non linear behavior, i.e. the gain decreases sharply for high input signals compared

10 to smaller input signals; moreover the output signal is phase distorted due to the well known AM/PM conversion, i.e. due to the conversion of amplitude modulation into phase modulation.

The distortion of the output signal with respect to the input signal is generally not admissible as far as non constant envelope signals are used. This is more

15 particularly true in the field of telecommunications which necessitates both power efficiency and good qualities of signals.

In order to linearise amplifiers, several solutions are known. However, it has been observed that none of the conventional solutions can provide power efficiency over a wide frequency band as it is often requested more particularly in the above

20 mentioned field of telecommunications. For instance, in future radio telephone systems, use will be made of CDMA (Code Division Multiple Access) where the modulation is spread over a frequency band of several megahertz. In fact, in CDMA, to each symbol, such as a bit, is superposed a code which is a sequence at a higher frequency.

25 The only solution which is known, up to now, for the linearisation over a wide frequency band of a non constant envelope signal is the analog feed forward technology wherein no feed back loop is provided. It corrects in real time, the non-linearities, even if they are frequency dependent. In the analog feed forward technology, the non linearities are substracted from the input signal to amplify.

30 However, this solution has a very low power efficiency. According to the present state of the art the total power efficiency of an RF amplifier with analog feed forward linearisation is about 6% and a power amplifier has an efficiency of about 30% or more when it is not provided with this linearisation. Moreover, analog feed-forward is expensive and increases significantly the size of the device. The high cost

35 comes from the fact that the corresponding circuits need calibration and tuning.

It is also known to use digital predistortion which has the advantage of a good efficiency. However, it has been observed that digital predistortions of amplifiers work correctly only on narrow and medium frequency bands.

Summary of the Invention

5   In order to provide a power efficient and wide band linearisation of power amplifiers, the method according to the invention is characterized in that the instantaneous frequency of each sampled input signal is measured and in that, to each real time sample, is applied a digital predistortion which depends on the measured instantaneous frequency.

10   In one embodiment, the digital predistortion is performed with a set of look-up tables, each look-up table corresponding to a given frequency or to a given frequency domain or subband.

For each real time sample, the look-up table corresponding to the measured frequency applies to the input signal a predistortion which compensates, at the output 15   of the amplifier, the distortions which would appear without the predistortions.

In an other embodiment, the predistortion is, for each frequency, represented by a set of coefficients which are coefficients of a polynom for which the variable is the amplitude of the input signal and which provide the necessary predistortion for this input signal.

20   With this last embodiment, it is possible to use less memory capacity than with a look-up table. In fact, in this latter case, it is necessary to keep in memory for each frequency or frequency domain, the predistortion values for all possible values of the amplitude of the input signal; on the contrary with polynom coefficients, it is only necessary to keep in memory a set of coefficients for each frequency or fre-25   quency domain. However, with this embodiment, it is necessary to use more calculation in order to derive (calculate the polynoms) the predistortion from the input amplitude value and the coefficients.

According to a preferred embodiment, in order to limit the capacity of the memory for storing tables or coefficients, the accuracy of the signal representing the 30   frequency is lower than the accuracy of the amplitude of the input signal. Therefore, it is possible to limit the number of look-up tables or the number of sets of coefficients. For instance, if the amplitude of the input signal is represented by a sixteen bit number, the frequency may be represented by a four bit number. In fact, it has been observed that, although non linearities are frequency dependent, on narrow or 35   medium bands, they are relatively frequency insensitive inside a narrow or medium band. In other words, the wide frequency band to be amplified may be divided into a

limited number of domains inside which the same look-up table or the same coefficients may be used.

In order to measure or estimate the instantaneous frequency of each input sample, in an embodiment, the phase between two successive samples is measured, for instance the difference between the phase of the present sample and the phase of the previous sample, or the difference between the phase of the present sample and the phase of the next sample. It is also possible to estimate the instantaneous frequency through an interpolation of the measurement of the phase differences of several successive samples.

As generally the samples are represented in rectangular coordinates by an in phase abscissa I and a quadrature ordinate Q, in order to derive the amplitude and phase, it is necessary to use a rectangular to polar coordinate conversion, for instance, a Cordic conversion. This last conversion method is well known; as it is based on successive additions and subtractions it may be easily realized into an integrated circuit.

The method and the amplifier according to the invention may be used either in base band or in intermediate frequency (IF) band according to the availability and performances of D/A converters.

Due to aging, drifts, variations of power voltages and other operating parameters, it may be necessary to update periodically, or from time to time, the look-up tables or the polynomial coefficients. These tables or coefficients may be updated through measurements of output signals from the amplifier and conventional algorithms which modify the tables or coefficients in view of the measurements, more particularly in view of the comparison between output and input signals.

The input signals used for the updating method may be specific test signals, or the regular input signals.

The measurement of signals at the output of the amplifier is performed by a receiver. In the case of a telecommunication equipment the power amplifier is used in a transmitter, which is generally associated with a receiver. In that case, the receiver used for the measurement of output signals may be the receiver associated with the transmitter for the duplex transmission/reception. It may also be a specific receiver, such as a coherent receiver (heterodyne or superheterodyne).

The invention relates generally to a method for the linearisation of a wide frequency band power amplifier. According to the invention, the frequency band of operation of the amplifier is divided into at least two groups or subbands, the instantaneous frequency of each sampled input signal is measured in order to

determine the group or subband to which it belongs and, predistortions are applied to the input signal, these predistortions depending on the frequency group.

In an embodiment, the frequency dependent predistortions are provided by a set of look-up tables, the number of look-up tables being equal to the number of
5 frequency subbands, a look-up table containing, for each amplitude of the input signal, two correction values representing the amplitude and the phase of a predistortion.

In another embodiment, the predistortion values are calculated by using coefficients of a polynom of which the variable is the amplitude of the input signal.

10 In a further embodiment, the instantaneous frequency of the sampled input signal is calculated by the derivative of the phase of this input signal.

The instantaneous frequency of the sampled input signal may be calculated by the substraction of the phases of two successive samples.

The input sampled signals are, in an embodiment, represented by their
15 rectangular coordinates in a complex plane and their rectangular coordinates are converted into polar coordinates, the phase being used to determine the frequency group and the amplitude being used to determine the predistortion values in the frequency group.

According to an embodiment, the accuracy of measurement of the instan-
20 taneous frequency is lower than the accuracy of the input signal.

The predistortion values or coefficients may be periodically updated by measuring the effect of input test or regular signals on the output signal of the amplifier and by calculating the predistortion values or coefficients based on this measurement.

25 The invention relates also to an application of the method to the linearisation of the power amplifier of a transmitter.

Such transmitter may transmit CDMA signals.

In an embodiment, the transmitter comprises a coherent receiver which is used for the updating of predistortion values or coefficients.

30 The invention relates to an application of the method to a station comprising a transmitter with a power amplifier to be linearised and a receiver, wherein the receiver is used for measuring the output of the power amplifier for updating predistortion values or coefficients.

Brief Description of the Drawings

Other features and advantages of the invention will appear with the description of certain of its embodiments, this description being made in conjunction with the following drawings which represent:

figure 1, a diagram showing the variation of the output signal of an

5 amplifier versus its input signal,

figure 2 is a frequency band diagram showing one aspect of the invention, and

figure 3 is a schematic representation of one embodiment of the invention.

<u>More detailed Description of the Invention</u>

10 The example which will be now described with reference to the drawings refers to a transmitter/receiver for a cellular telephone base station of the third generation, i.e. of the UMTS (Universal Mobile Telephone System) which is presently under development.

It is recalled here that in a cellular telephone system, each subscriber is

15 connected to a network through a base station which is called a base transceiver station (BTS). This station receives communications from subscribers and transmits them to other subscribers. The capacity of the telecommunications system depends on performances of such base station, and, among others, on the efficiency of its power amplifiers and on RF coupling constraints.

20 In order to minimize the cost of such station and to comply with the spectral shaping requested by standards, it is necessary that it uses a single amplifier. As this system is using CDMA between subscribers and base stations and as CDMA may be considered as noise having important variations in envelope (due to the stacking of a plurality of users' spreading codes) over a wide band of several megahertz, it is

25 essential for this application to properly linearise the amplifier over a wide band. If the power amplifier was not linearised, it would be necessary either to use large guard bands, i.e. unused spectrum, between adjacent channels in order to avoid interference from one channel to the other due to non linearities, or to overdimension power amplifiers (back off).

30 Figure 1 is a diagram of operation of an amplifier 10 (figure 3) wherein it appears that, when the input signal S_i becomes greater than a given value L, the output signal S_o remains practically constant. This well known feature of an amplifier is called "saturation".

In order to use at best such amplifier, it is preferable to use it near satura-

35 tion. However, in this case, the gain (the ratio S_o/S_i) becomes non constant in amplitude and phase and this non constant behavior generates in band distortions of

the output signal as well as out of band interferences which may be detrimental not only to the transmitted signal, but also to signals which may be transmitted simultaneously, at the same frequency or at different frequencies.

In order to prevent these non linearities, it is known to apply predistortions to
5 the input signal which compensate the distortions which would be, without these predistortions, present in the output signal.

According to the invention, the frequency band ΔF of the power amplifier is subdivided into domains or subbands ΔF_1, ΔF_2, ... ΔF_n (figure 2) and the corresponding predistortion is provided for each subband.

10 Figure 3 represents a base station comprising the above mentioned power amplifier 10 and also a coherent receiver chain 16. The output of amplifier 10 is connected to a transmitting/receiving antenna 18 through a coupler 20. The coupler is used also to connect the antenna 18 to the input of the receiver chain 16.

The receiver chain is a dedicated chain used for the measurement of output
15 signals of the amplifier in order to update tables or sets of coefficients as will be explained herein below.

The signals to be amplified by power amplifier 10 are samples at a sample frequency of 32,768 megahertz. These samples are, classically, represented by their complex coordinates I and Q. The coordinates I and Q are applied to the respective
20 inputs 22_1 and 22_2 of a complex multiplier accumulator (CMAC) 22, the function of which will be described later. These two coordinates I and Q, which represent the real time signal in rectangular coordinates are converted into polar coordinates by a Cordic converter 24. This converter 24 has two outputs 24_1 and 24_2. The output 24_1 provides the amplitude R of the instantaneous input signal and the output 24_2
25 provides the phase φ of the input sample.

The R output 24_1 is connected to the amplitude input of a RAM memory containing look-up tables (LUT) and the output 24_2 of converter 24 is connected to the input of a differentiator 28 which operates at the sample frequency. The output 28_1 of this differentiator is connected to a frequency input 26_2 of the memory 26.

30 In an embodiment, the differentiator is a substractor which makes the difference between the phase of the present sample and the phase of the previous sample.

The RAM memory 26 has also one input 26_3 connected to the output of a digital signal processor 30 which provides signals for updating the values in the
35 tables memorized in RAM 26 as explained hereinafter.

The RAM 26 has two outputs 26_4, 26_5 which provide signals $\Delta I'$, $\Delta Q'$ applied to corresponding respective inputs of CMAC 22.

These signals $\Delta I'$ and $\Delta Q'$ are predistortions of, respectively, I and Q which are applied to said coordinates in order to compensate for distortions due to non 5 linearities.

The complex multiplier/accumulator 22 has two digital outputs 22_3 and 22_4 on which appear the predistorted components I_1 and Q_1 of the input sampled signal. These digital components are connected to the respective inputs of a quadrature mixer 32 through, respectively, digital to analog (D/A) converters 34_3 and 34_4. The 10 role of this mixer 32 is, in connection with an intermediate frequency local oscillator 36, to convert the input signal, which is in base band frequency, into intermediate frequency.

The output of mixer 32 is connected to the input of another mixer 38 through an intermediate frequency (IF) interface 40 including and IF filter having a 15 band pass of at least 3 (for instance) times the useful channel, this band pass being preferably flat. In fact, if the band pass would correspond exactly to the useful channel, it would not be possible to linearize correctly outside of this channel.

The mixer 38 converts, with a second local oscillator 42, the IF into a signal modulated at the transmission frequency. The output of mixer 38 is connected to the 20 input of power amplifier 10.

The output of receiver chain 16 is also connected to the input of a quadrature mixer 44 which, with a local oscillator 46, converts the received signal into analog I_D and Q_D components of the received signal. These components are in the base band frequency. These signals are applied to respective inputs 30_1, 30_2 of processor 25 30 where they are converted into digital format.

In this example, local oscillators 42 and 46 are synchronized.

The operation is as follows:

In memory 26 are stored n tables, one for each frequency subband ΔF_1 ... ΔF_n. The selection of the table is made according to the instantaneous frequency 30 measured by differentiator 28. The memory 26 delivers signals $\Delta I'$ and $\Delta Q'$ which are combined to components I and Q to predistort the signals which will be provided on mixer 32 and, through mixer 38, on the input of power amplifier 10.

In an embodiment, n=16, i.e. the number of bits of $\Delta\varphi=\varphi(t) - \varphi(t - 1)$ has an accuracy of four bits, although the components I and Q may be much more accu-35 rate, i.e. may have more bits, for instance 16 bits.

In this embodiment, a look-up table is a table of correspondence between the amplitude R of the input signal provided by output 24_1 of converter 24, and predistortion components $\Delta I'$ and $\Delta Q'$. In other words, for each increment of amplitude R, $\Delta I'$ and $\Delta Q'$ may vary.

5   In another embodiment, in order to reduce the capacity of memory 26, instead of a table, a precalculated mathematical model of predistortions is established. The simpler model is a polynomial model wherein:

$$\Delta I' = a_1 R + a_2 R^2 + a_3 R^3 + \dots \text{ and}$$
$$\Delta Q' = b_1 R + b_2 R^2 + b_3 R^3 + \dots,$$

10   and the memory 26 contains only the set of coefficients a_1, a_2 ... b_1, b_2 ... for each frequency, and the polynoms, i.e. the values $\Delta I'$ and $\Delta Q'$, are calculated by a processor, for instance installed between memory 26 and CMAC 22.

The role of processor 30 is to apply on input 26_3 of memory 26 updated values of each item of the tables (or of each coefficient in case of a polynomial 15 model). In fact, it is necessary to update these values and coefficients at least from time to time, because of aging, temperature variations, variations of power voltages, etc.

This updating is performed by a learning algorithm which is implemented in processor 30. Such learning algorithm being conventional, it is not necessary to 20 describe it in details.

In a first embodiment, the operation of the amplifier is stopped periodically, for instance during periods of low traffic, and test signals are injected at the input. These test signals are detected by the receiver chain 16,44 through the coupler 20 which provides on inputs 30_1 and 30_2 analog signals which are used to calculate the 25 predistortion values of the tables, or the coefficients of the polynoms.

For instance, the test signal comprises, for each frequency subband ΔF_1, ΔF_2, etc., two isolated frequencies and the extra spectral values which may appear on inputs 30_1 and 30_2 are used to calculate the predistortion values or coefficients.

In a second embodiment, the learning or updating algorithm uses the nor-30 mal signals applied to the amplifier. Therefore, it is not necessary to stop the operation of the base station for updating. Moreover, with such real time algorithm, it is possible to update more frequently the values or coefficients.

In that case, the processor 30 needs inputs 30_3 and 30_4 for the I and Q values applied on the inputs of multiplier 22 and also an input 30_5 for the sample 35 frequency as a reference signal.

It is to be noted that, whatever learning algorithm is used, instead of using a dedicated associated coherent receiver chain 16,44, the usual base station receiver (not shown) may be used in order to check or measure the effect of test signals, or of normal signals, on the output of amplifier for calculating the predistortion values or

5   coefficients, provided that, during this time, the receiver is tuned to the transmission band.

When the base station is provided with two receivers, which are normally used simultaneously (this is generally called uplink diversity), one of these receivers may be used also for the detection of test signals or normal signals and it provides

10   signals at the input 30_1, 30_2 of processor 30. This embodiment is particularly useful when the updating is performed during normal operation because, with the use of the second receiver, it is possible to minimize the effect of the updating on normal performances of the amplifier 10.

It is to be noted that the method and the device which have been described

15   may be used for the linearisation of power amplifiers, the digital input signals being either in intermediate frequency or in base band frequency.

CLAIMS

1. A method for the linearisation of a wide frequency band power amplifier, a method wherein:

the frequency band of operation of the amplifier is divided into at least two groups or subbands ,

the instantaneous frequency of each sampled input signal is measured in order to determine the group or subband to which it belongs and,

predistortions are applied to the input signal, these predistortions depending on the frequency group.

2. A method according to claim 1, wherein the frequency dependent predistortions are provided by a set of look-up tables, the number of look-up tables being equal to the number of frequency subbands, a look-up table containing, for each amplitude of the input signal, two correction values representing the amplitude and the phase of a predistortion.

3. A method according to claim 1, wherein the predistortion values are calculated by using coefficients of a polynom of which the variable is the amplitude of the input signal.

4. A method according to claim 1, wherein the instantaneous frequency of the sampled input signal is calculated by the derivative of the phase of this input signal.

5. A method according to claim 4, wherein the instantaneous frequency of the sampled input signal is calculated by the substraction of the phases of two successive samples.

6. A method according to claim 1, wherein the input sampled signals are represented by their rectangular coordinates in a complex plane and in that the rectangular coordinates are converted into polar coordinates, the phase being used to determine the frequency group and the amplitude being used to determine the predistortion values in the frequency group.

7. A method according to claim 1, wherein the accuracy of measurement of the instantaneous frequency is lower than the accuracy of the input signal.

8. A method according to claim 1, wherein the predistortion values or coefficients are periodically updated by measuring the effect of input test or regular signals on the output signal of the amplifier and by calculating the predistortion values or coefficients based on this measurement.

9. Application of a method according to any of the previous claims, to the linearisation of the power amplifier of a transmitter.

10. A transmitter including a power amplifier linearised by means of a method according to any of claims 1 to 8, wherein said transmitter transmits CDMA signals.

11. A transmitter including a power amplifier linearised by means of a method according to any of claims 1 to 8, wherein said transmitter comprises a coherent receiver which is used for the updating of predistortion values or coefficients.

12. Application of the method according to claim 8 to a station comprising a transmitter with a power amplifier to be linearised and a receiver, wherein the receiver is used for measuring the output of the power amplifier for updating predistortion values or coefficients.

METHOD FOR LINEARISING A POWER AMPLIFIER OVER A WIDE FREQUENCY BAND

ABSTRACT

The invention relates to a method for the linearisation of a wide frequency band power amplifier .

The frequency band of operation of the amplifier is divided into at least two groups or subbands. The instantaneous frequency of each sampled input signal is measured in order to determine the group or subband to which it belongs, and predistortions are applied to the input signal, these predistortions depending on the frequency group.

This invention is particularly useful for the linearization of a power amplifier of a transmitter.
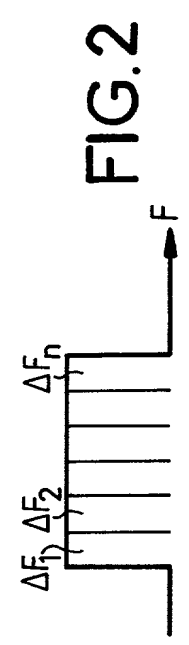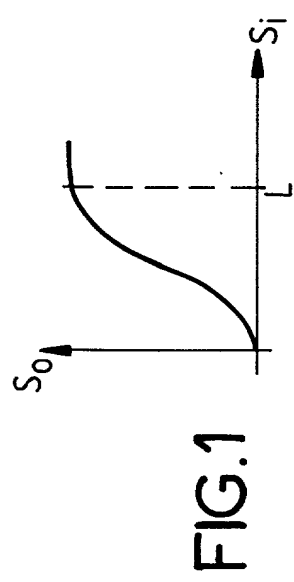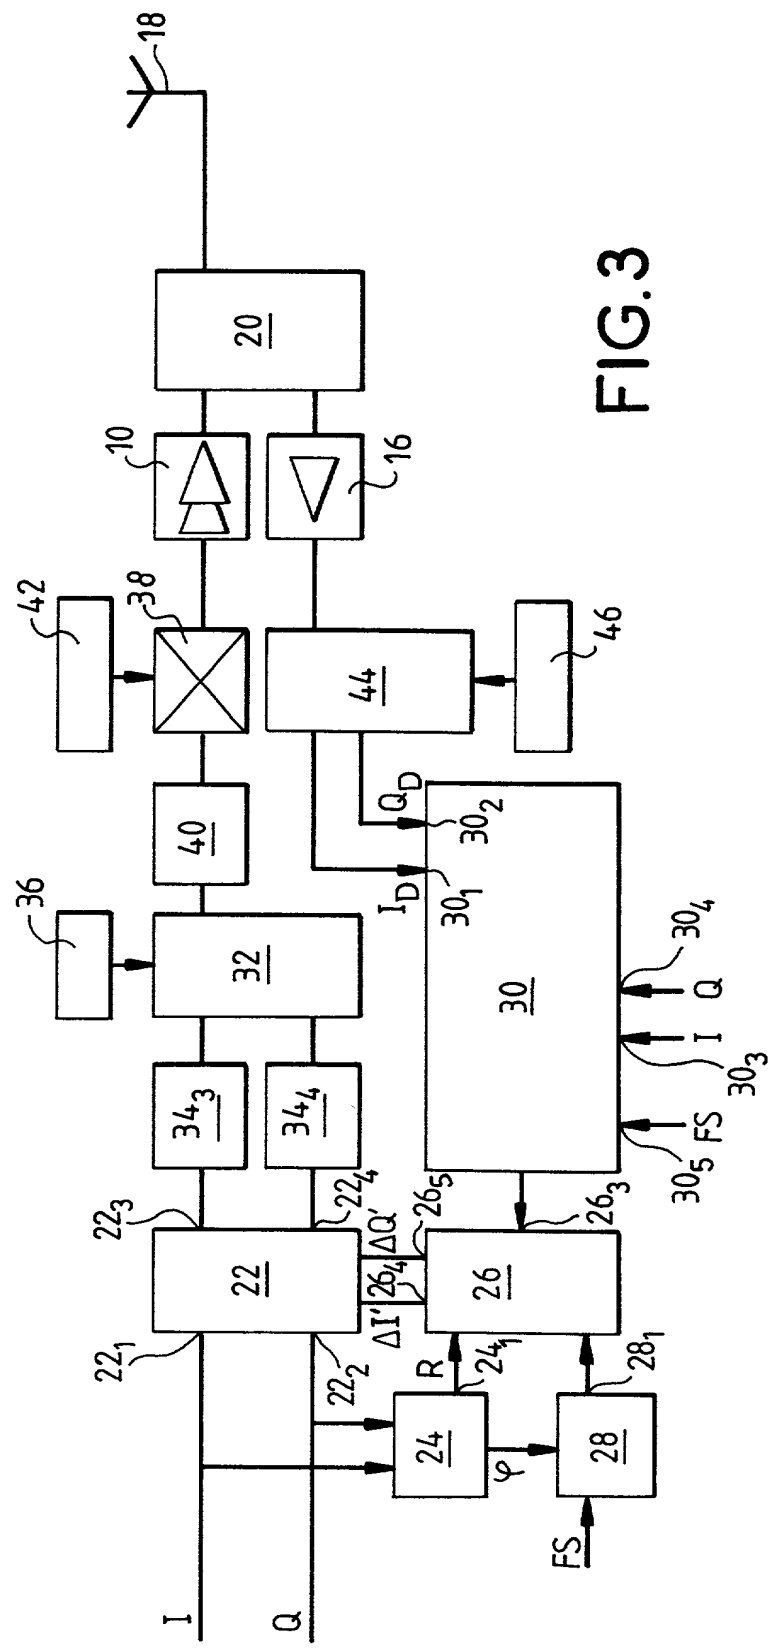
Figure 3:

FIG.2

FIG.1

FIG.3

S_o

S_i

L

F

ΔF_1 ΔF_2 ... ΔF_n

Declaration and Power of Attorney for Patent Application

Déclaration et Pouvoirs pour Demande de Brevet

French Language Declaration

En tant que l'inventeur nommé ci-après, je déclare par le présent acte que:

As a below named inventor, I hereby declare that:

Mon domicile, mon adresse postale et ma nationalité sont ceux figurant ci-dessous à côté de mon nom.

My residence, post office address and citizenship are as stated next to my name.

Je crois être le premier inventeur original et unique (si un seul nom est mentionné ci-dessous), ou l'un des premiers co-inventeurs originaux (si plusieurs noms sont mentionnés ci-dessous) de l'objet revendiqué, pour lequel une demande de brevet a été déposée concernant l'invention de la description identifiée par le numéro de référence

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention in the specification identified by Docket No.

102439/MA/RCD

Je déclare par le présent acte avoir passé en revue et compris le contenu de la description ci-dessus, revendications comprises.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims.

Je reconnais devoir divulguer toute information pertinente à la brevetabilité, comme défini dans le Titre 37, § 1.56 du Code Fédéral des réglementations.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

Je revendique par le présent acte avoir la priorité étrangère, en vertu du Titre 35, § 119(a)-(d) ou § 365(b) du Code des Etats-Unis, sur toute demande étrangère de brevet ou certificat d'inventeur ou, en vertu du Titre 35, § 365(a) du même Code, sur toute demande internationale PCT désignant au moins un pays autre que les Etats-Unis et figurant ci-dessous et, j'ai aussi indiqué ci-dessous toute demande étrangère de brevet, tout certificat d'inventeur ou toute demande internationale PCT ayant une date de dépôt précédant celle de la demande à propos de laquelle une priorité est revendiquée.

I hereby claim foreign priority under Title 35, United States Code, § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below, and have also identified below any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Prior foreign application(s) for which priority is claimed
Demande(s) de brevet étrangère(s) antérieure(s) dont la priorité est revendiquée

(Number) (Numéro)	(Country) (Pays)	(Day/Month/Year Filed) (Jour/Mois/Année de dépôt)
99 401 627.7	EUROPEAN PROCEDURE	30/June/1999

Prior foreign applications for which priority is not claimed
Demande(s) de brevet étrangères antérieure(s) dont la priorité n'est pas revendiquée

(Number) (Numéro)	(Country) (Pays)	(Day/Month/Year Filed) (Jour/Mois/Année de dépôt)

French Language Declaration

Je revendique par le présent acte tout bénéfice, en vertu du Titre 35, § 119(e), du Code des Etats-Unis, de toute demande de brevet provisoire effectuée aux Etats-Unis et figurant ci-dessous.

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

(Application No.)
(No de demande)

(Filing Date)
(Date de dépôt)

Je revendique par le présent acte tout bénéfice, en vertu du Titre 35, § 120 du Code des Etats-Unis, de toute demande de brevet effectuée aux Etats-Unis, ou en vertu du Titre 35, § 365(c) du même Code, de toute demande internationale PCT désignant les Etats-Unis et figurant ci-dessous et, dans la mesure où l'objet de chacune des revendications de cette demande de brevet n'est pas divulgué dans la demande antérieure américaine ou internationale PCT, en vertu des dispositions du premier paragraphe du Titre 35, § 112 du Code des Etats-Unis, je reconnais devoir divulguer toute information pertinente à la brevetabilité, comme défini dans le Titre 37, § 1.56 du Code fédéral des réglementations, dont j'ai pu disposer entre la date de dépôt de la demande antérieure et la date de dépôt de la demande nationale ou internationale PCT de la présente demande.

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

(Application No.)
(N0 de demande)

(Filing Date)
(Date de dépôt)

(Status)(patented, pending, abandoned)
(Statut)(breveté, en cours d'examen, abandonné)

Je déclare par le présent acte que toute déclaration ci-incluse est, à ma connaissance, véridique et que toute déclaration formulée à partir de renseignements ou de suppositions est tenue pour véridique; et de plus, que toutes ces déclarations ont été formulées en sachant que toute fausse déclaration volontaire ou son équivalent est passible d'une amende ou d'une incarcération, ou des deux, en vertu de la Section 1001 du Titre 18 du Code des Etats-Unis, et que de telles déclarations volontairement fausses risquent de compromettre la validité de la demande de brevet ou du brevet délivré à partir de celle-ci.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POUVOIRS: En tant que l'inventeur cité, je désigne par la présente l'(les) avocat(s) et/ou agent(s) suivant(s) pour qu'ils poursuive(nt) la procédure de cette demande de brevet et traite(nt) toute affaire s'y rapportant avec l'Office des brevets et des marques: (mentionner le nom et le numéro d'enregistrement).

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: (list name and registration number)

John H. Mion, Reg. No. 18,879; Thomas J. Macpeak, Reg. No. 19,292; Robert J. Seas, Jr., Reg. No. 21,092; Darryl Mexic, Reg. No. 23,063; Robert V. Sloan, Reg. No. 22,775; Peter D. Olexy, Reg. No. 24,513; J. Frank Osha, Reg. No. 24,625; Waddell A. Biggart, Reg. No. 24,861; Louis Gubinsky, Reg. No. 24,835; Neil B. Siegel, Reg. No. 25,200; David J. Cushing, Reg. No. 28,703; John R. Inge, Reg. No. 26,916; Joseph J. Ruch, Jr., Reg. No. 26,577; Sheldon I. Landsman, Reg. No. 25,430; Richard C. Turner, Reg. No. 29,710; Howard L. Bernstein, Reg. No. 25,665; Alan J. Kasper, Reg. No. 25,426; Kenneth J. Burchfiel, Reg. No. 31,333; Gordon Kit, Reg. No. 30,764; Susan J. Mack, Reg. No. 30,951; Frank L. Bernstein, Reg. No. 31,484; Mark Boland, Reg. No. 32,197; William H. Mandir, Reg. No. 32,156; Scott M. Daniels, Reg. No. 32,562; Brian W. Hannon, Reg. No. 32,778; Abraham J. Rosner, Reg. No. 33,276; Bruce E. Kramer, Reg. No. 33,725; Paul F. Neils, Reg. No. 33,102; and Brett S. Sylvester, Reg. No. 32,765; and Robert M. Masters, Reg. No. 35,603.

| Adresser toute correspondance à: | Send Correspondence to:
SUGHRUE, MION, ZINN, MACPEAK & SEAS, PLLC
2100 Pennsylvania Avenue, N.W., Suite 800
Washington, D.C. 20037-3213 |

Nom complet de l'unique ou premier inventeur	Full name of sole or first inventor (First Middle Last) Luc DARTOIS
Signature de l'inventeur Date	Inventor's signature *Luc Dartois* Date 23/03/99
Domicile	Residence 78955 CARRIERES SOUS POISSY, FRANCE
Nationalité	Citizenship FRANCE
Adresse postale	Post Office Address 98, avenue Paul Denis Huet 78955 CARRIERES SOUS POISSY FRANCE
Nom complet du second co-inventeur, le cas échéant	Full name of second joint inventor, if any (First Middle Last)
Signature du second inventeur Date	Second inventor's signature Date
Domicile	Residence
Nationalité	Citizenship
Adresse postale	Post Office Address

(Fournir les mêmes renseignements et la signature de tout co-inventeur supplémentaire.)

(Supply similar information and signature for third and subsequent joint inventors.)